



JSC MICROPRO RADIATA PINE WEATHERBOARD PROFILES

VERTICAL SHIPLAP WEATHERBOARDS



SQUARE EDGES PROFILES - 8mm CHANNEL

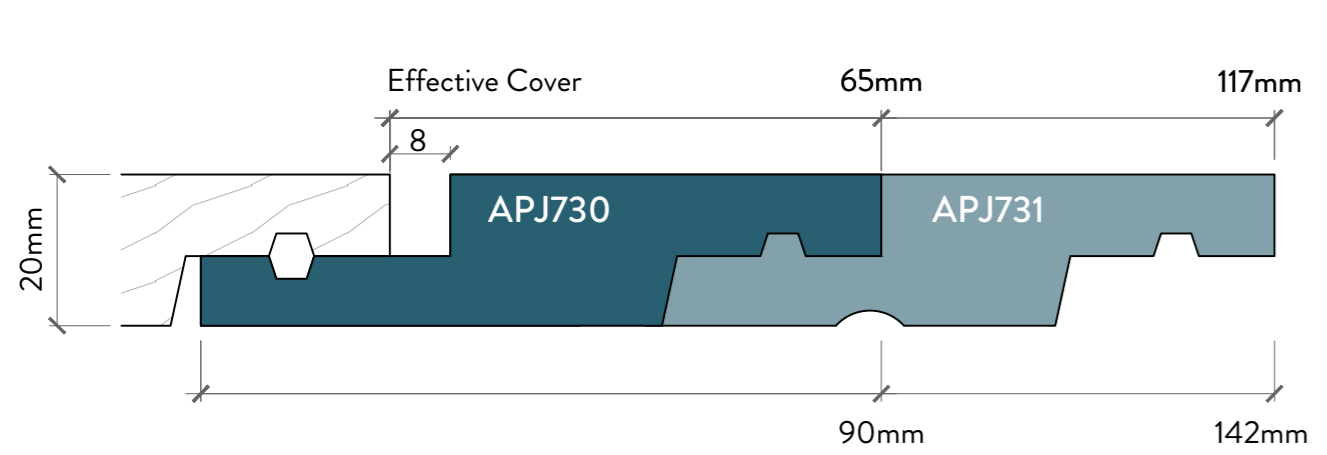

BEVELLED EDGES PROFILES - 6mm CHANNEL

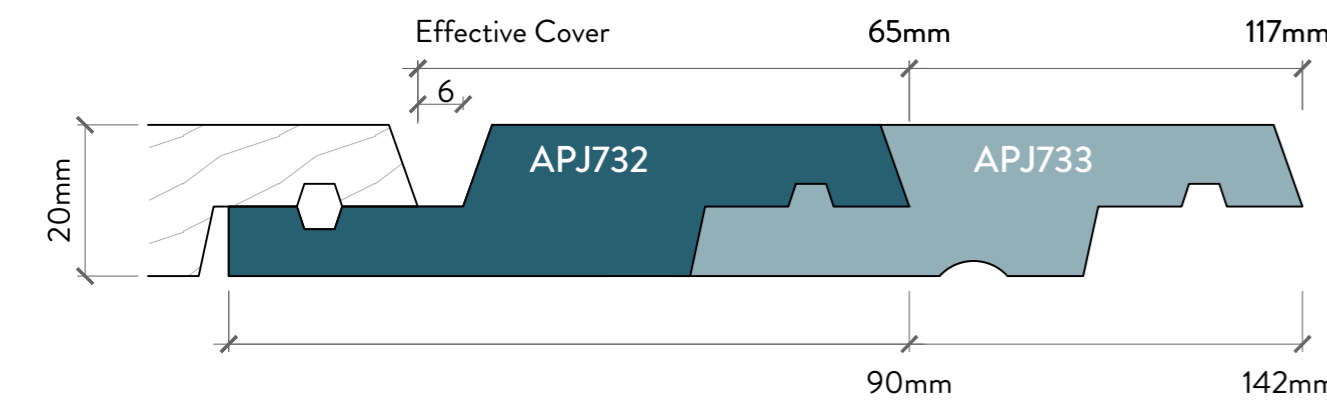


VERTICAL BOARD & BATTEN

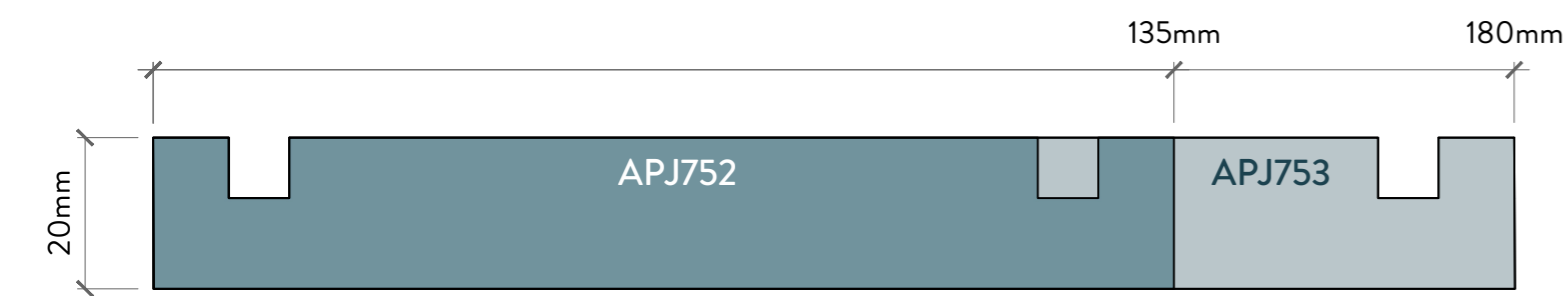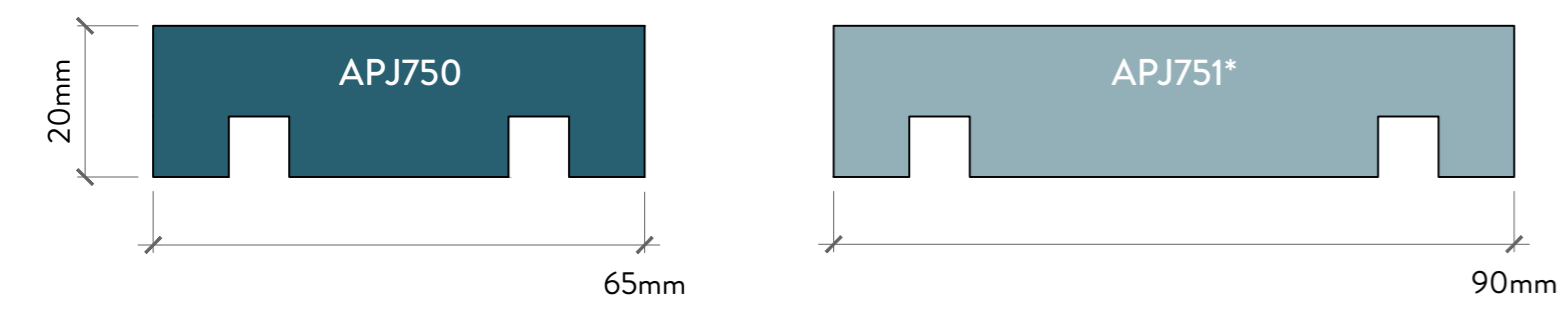


RUSTICATED HORIZONTAL WEATHERBOARDS


SINGLE GROOVE RUSTIC PROFILE - 8mm CHANNEL

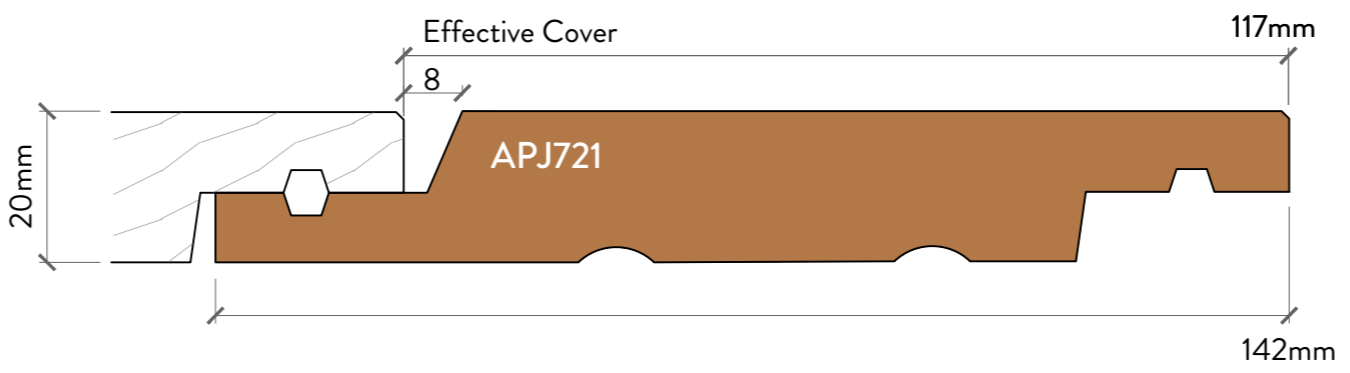


SINGLE GROOVE RUSTIC PROFILE - 16mm CHANNEL

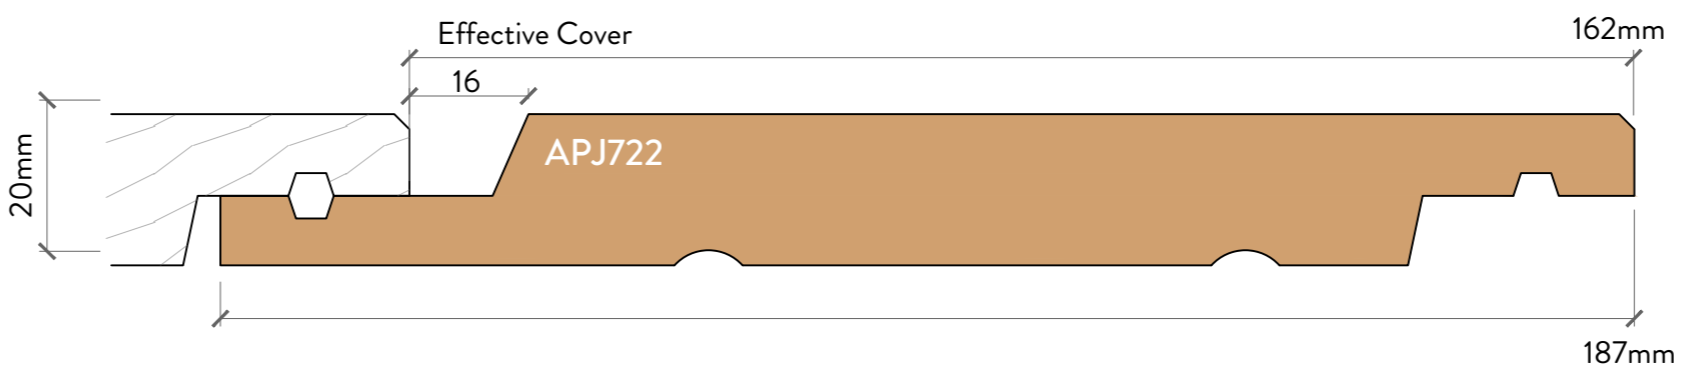

TRADITIONAL RUSTICATED PROFILES - 26mm CHANNEL

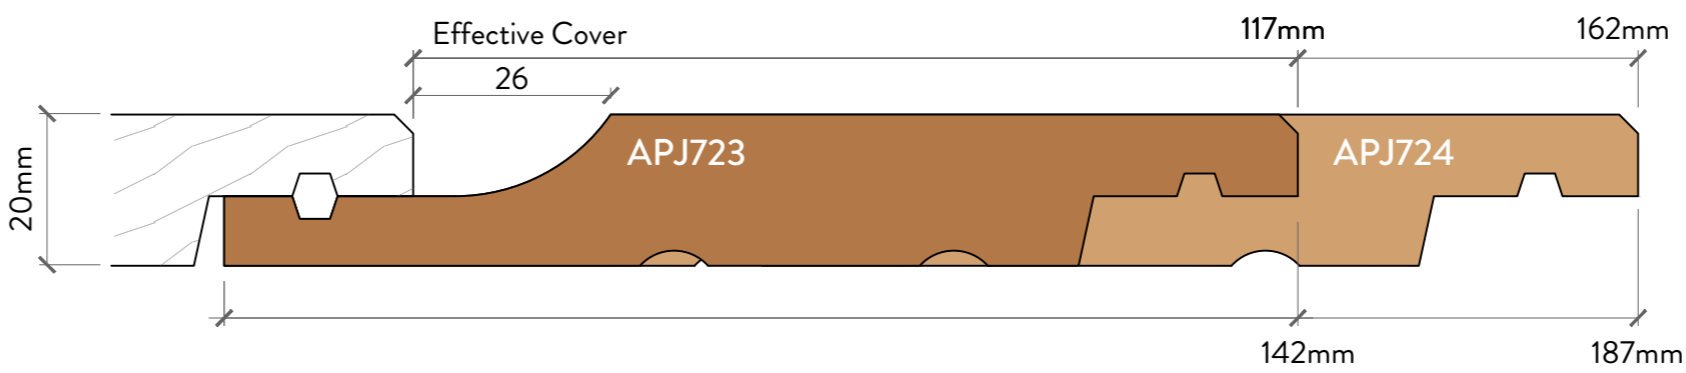


BEVEL BACK WEATHERBOARDS

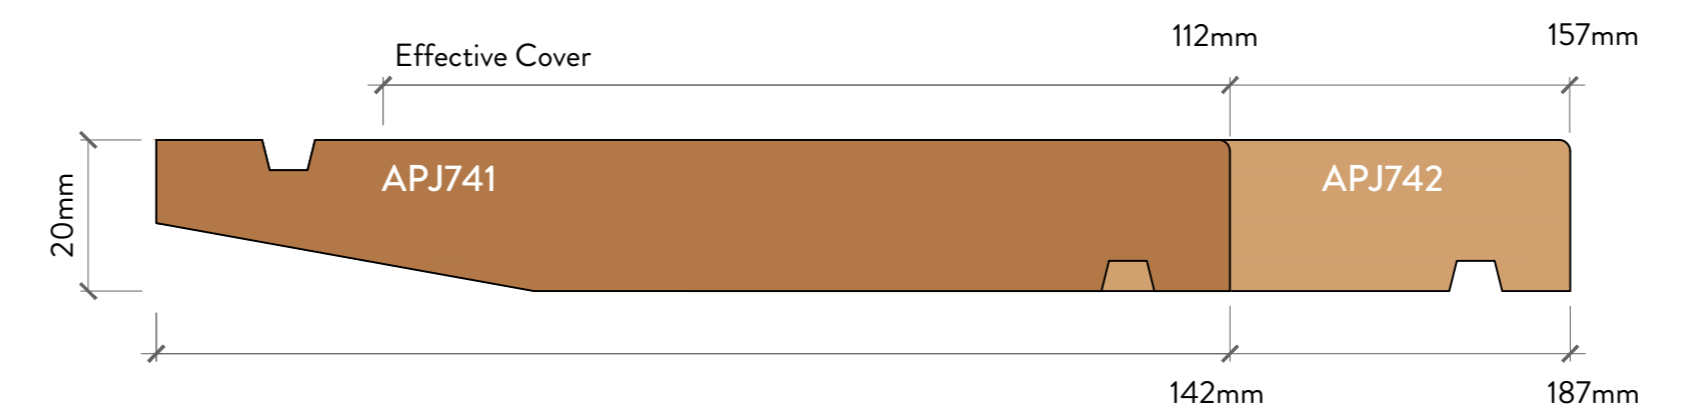


EXTERIOR MOULDINGS


SCRIBER

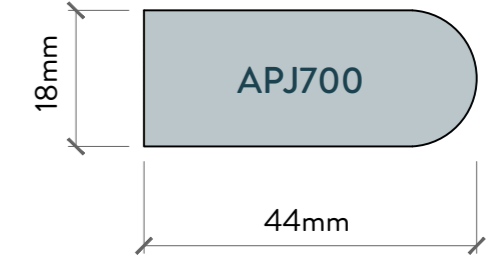




EAVES MOULD

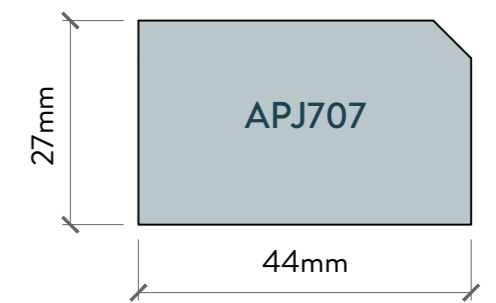

INTERNAL CORNER MOULDING



EXTERNAL CORNER MOULDINGS

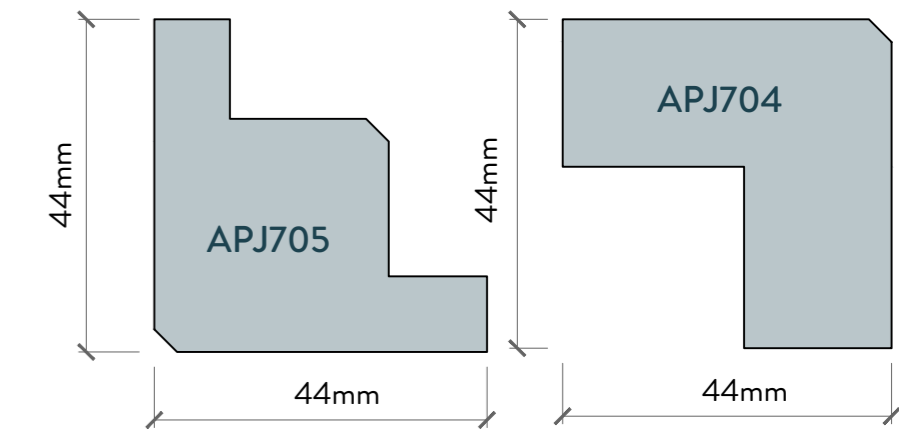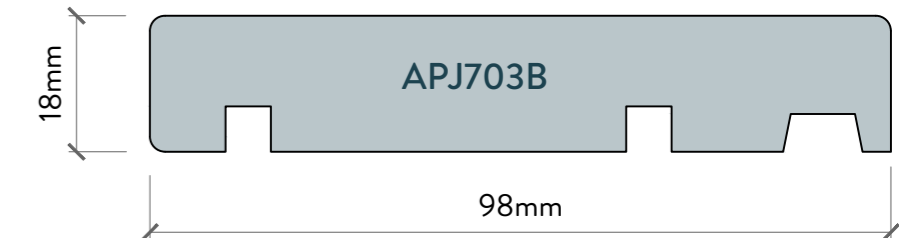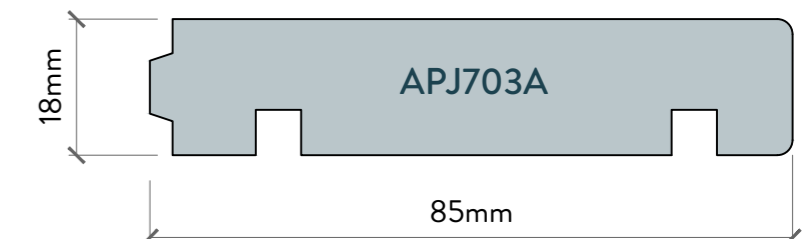

***NOTE:** APJ751 to be used as corner profile only

NOTES

- Profiles on this chart show the standard JSC Profile range.
- Recommended Fixings: 316 Stainless Steel or Silicon Bronze Annular Grooved Nails
- Paint colour Light Reflective Value (LRV) to be 45% minimum for JSC MicroPro Radiata Pine.
- Profiles are available in Band Sawn finish. Dressed finish is available depending on coating requirement.
- For paint applications, profiles with sharp edges are machined with 1.5 mm radius.
- Custom profiles available on request.
- Not all lengths are available in all profiles.
- Not all profiles or lengths are in stock.
- JSC weatherboards must be installed by a suitably qualified and experienced tradesperson in accordance with the chosen cladding specification, installation and maintenance documentation.
- Details are subject to change without notification. Refer to www.jsc.co.nz for up to date documentation.

www.jsc.co.nz
0800 57 26 88

