



PURPLEHEART

Leguminosae, Peltogyne Excelsa & Others




PREMIUM ARCHITECTURAL
& BUILDING SOLUTIONS

Durable decking timber



Unique aesthetics



Smooth texture &
machines well



Class 1 durability &
stable in service

Purpleheart is an extremely dense and very strong South American hardwood. It has been used in New Zealand for many years. Purpleheart is one of the most durable exterior decking species and perfect for unique architectural projects.

Purpleheart usually has a straight grain, has a medium to fine texture, and a medium to high lustre.

The stages of the wood colour change:

1. Light brown when freshly cut
2. Turns a deep purple upon exposure
3. With exposure to weather it fades back to brown
4. Eventually turning to a dark brown before silvering off into a beautiful silver-grey colour after months of service

Note: if not UV exposed, the timber will remain purple in colour.




UV Exposed Purpleheart

PURPLEHEART APPLICATIONS

Purpleheart is an incredible timber with a magnitude of uses as it machines well, is easy to glue, takes finishes well, comes in many sizes and has a longer life span in comparison to other hardwoods.

- **Decking** - Purpleheart is the perfect decking choice for residential, commercial and boardwalk projects. It is renowned in NZ for its qualities and has been a popular choice as a decking timber in NZ. Available in *90×19mm & *140×19mm
- **Posts and Beams** - Purpleheart's inherent qualities makes it a perfect choice for pergolas, gazebos, rafters, and beams. Available in sizes up to *200×200mm
- **Commercial Projects** - Long life span and smooth fine texture that makes Purpleheart a sought after choice for commercial outdoor applications.

*Note: Subject to availability and lead times.

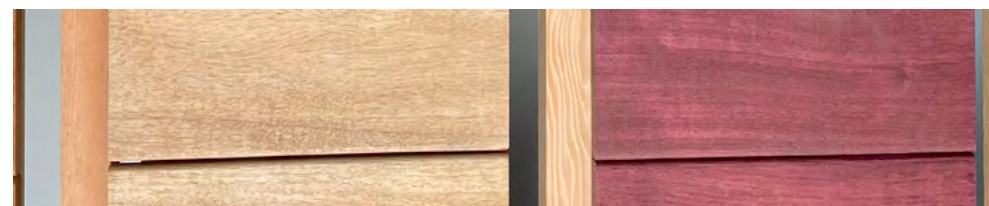

TECHNICAL INFORMATION

Colour and grain	Light brown when freshly cut, quickly turns deep purple upon exposure. Texture is medium to fine, lustre medium to high. Grain is usually straight, but occasionally wavy or irregular.
Supplier Certification	FSC® - C003608
Durability	Class 1*
Grades	Clear grades

*Durability classifications provide a useful comparative guide, however factors relating to specific installations and natural timber variation may result in sapwood pieces falling outside the species' durability classification.

Mechanical properties	Green	Dry
Modulus of Rupture (MPa)	105	147
Modulus of Elasticity (GPa)	14	17
Hardness Janka (kN)	9.2	11
*Density (kg/m3) *Air dry density (kg/m3) is average indication only and actual value may vary.	-	*900-1100kg/m ³

Note: For comparable species speak to the JSC team about alternatives.

Disclaimer: JSC has endeavored to ensure this information is accurate but recommends for critical applications that independent advice is obtained. These properties are a guide only, as timber is a natural product there will be variations within any species. Please speak to our professionals at JSC for information and advice as well as for any information around profiles, fixing details and supporting documentation.



The mark of
responsible forestry
FSC® C003608

jsc.co.nz
TechHelp@jsc.co.nz
Sales@jsc.co.nz

FIND JSC ONLINE  

AUCKLAND

(09) 412 2800
22 Sawmill Road
Riverhead

HAMILTON

0800 57 26 88
43 McKee Street
Pukete

WELLINGTON

0800 57 26 88
61 Seaview Road
Seaview

CHRISTCHURCH

(03) 348 9726
72 Hammersmith Drive
Sockburn

 PREMIUM ARCHITECTURAL
& BUILDING SOLUTIONS