SCREW FIXING JSC CLADDING

NOTE: Screw fixing installation is a viable option, however its effectiveness is very reliant on proper installation

REQUIRED SCREW

JSC supports these screws for our weatherboards, as others may cause performance issues:

- **WURTH ASSY plus 4 A2 SRCS Terrace Stainless Steel 5.5×70mm / 60mm**

More information: www.wurth.co.nz

- **TurboSpitze™ 316 Stainless Steel Cladding Screw 5.5×80mm / 60mm**

More information: www.ecko.co.nz

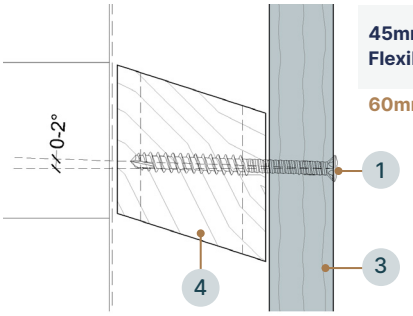

45mm Cavity Batten
Flexible/ Rigid Wall Underlay

60mm long screws



Complete the last few millimeters with extreme care.



Do not overdrive the screws, it may cause irreversible damage. Replace the weatherboard.

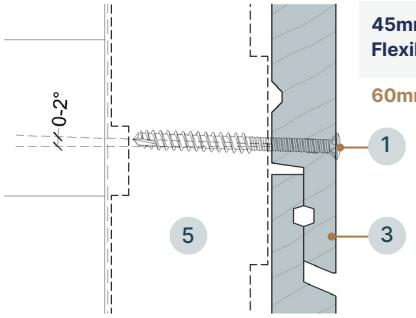

45mm Cavity Batten
Flexible / Rigid Wall Underlay

60mm long screws

INSTALLATION

- JSC weatherboards must be pre-drilled with a slight upward slope (0-2°), smaller than the screw shank to reduce the risk of moisture entry.
- WURTH's recommended pre-drill hole size for the suggested screw is **4.0mm**, please refer to Table A.1.1 of Wurth's Technical Assessment.
- TurboSpitze™ requires **3.5mm** pre-drilling and the supplier provides a **Depth Jig & Screw Driver** to ensure proper installation. Please refer to Technical Information.
- Single fix each weatherboard at 30 - 35 mm from the overlapping edge as per JSC specifications. Refer to JSC Cladding System Specification and Installation Guides for detailed weatherboard installation instructions.

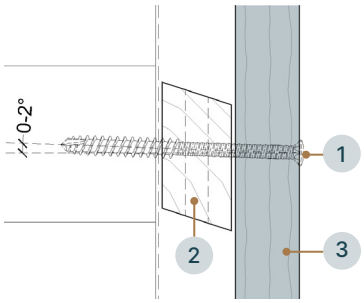

20mm Cavity Batten
Flexible/ Rigid Wall Underlay

70mm/80mm long screws (depening on the chosen screw)

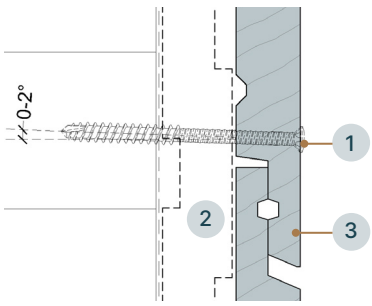

20mm Cavity Batten
Flexible/ Rigid Wall Underlay

70mm/80mm long screws (depening on the chosen screw)

1. Required Screw
2. JSC-U 45×20mm non-structural cavity batten
3. JSC Selected Weatherboards
4. JSC-H 45×45mm or JSC 70×45mm structural cavity batten
5. JSC-V 45×45mm or JSC 70×45mm structural cavity batten

NOTES

- A2 grade stainless steel (equivalent to 304) meets NZBC requirements but may develop surface rust over time. For applications where aesthetic is critical, consider using type 316 stainless steel fixings.
- Details may be subject to change without notice.
- To be read in conjunction with complete JSC Cladding System literature. Visit www.jsc.co.nz

jsc.co.nz
TechHelp@jsc.co.nz
Sales@jsc.co.nz

FIND JSC ONLINE

JSC PREMIUM ARCHITECTURAL & BUILDING SOLUTIONS